




Delay-on energisation PZA



Delay-on energisation timer for unlocking an interlock with delay

Approvals

	PZA
	◆
	◆
	◆

Unit features

- ▶ Positive-guided relay outputs:
 - 1 safety contact (N/O), delay-on energisation
 - 2 auxiliary contacts (N/C), delay-on energisation
- ▶ LED indicator for:
 - Switch status channel 1/2
 - Supply voltage
- ▶ 12 time values, set via rotary switch

- ▶ The circuit is redundant with built-in self-monitoring.
- ▶ The safety function remains effective in the case of a component failure.
- ▶ The correct opening and closing of the safety function relays is tested automatically in each on-off cycle.

Unit description

The unit operates as a time delay device

- ▶ in accordance with prEN 1088 (release with delay through timer)
- ▶ in safety circuits in accordance with VDE 0113-1 and EN 60204-1 (e.g. on movable guards)


The unit is designed for use with

- ▶ Safety relays from the PNOZ series
- ▶ Safety gate monitors from the PST series

Safety features

The relay conforms to the following safety criteria:

Block diagram

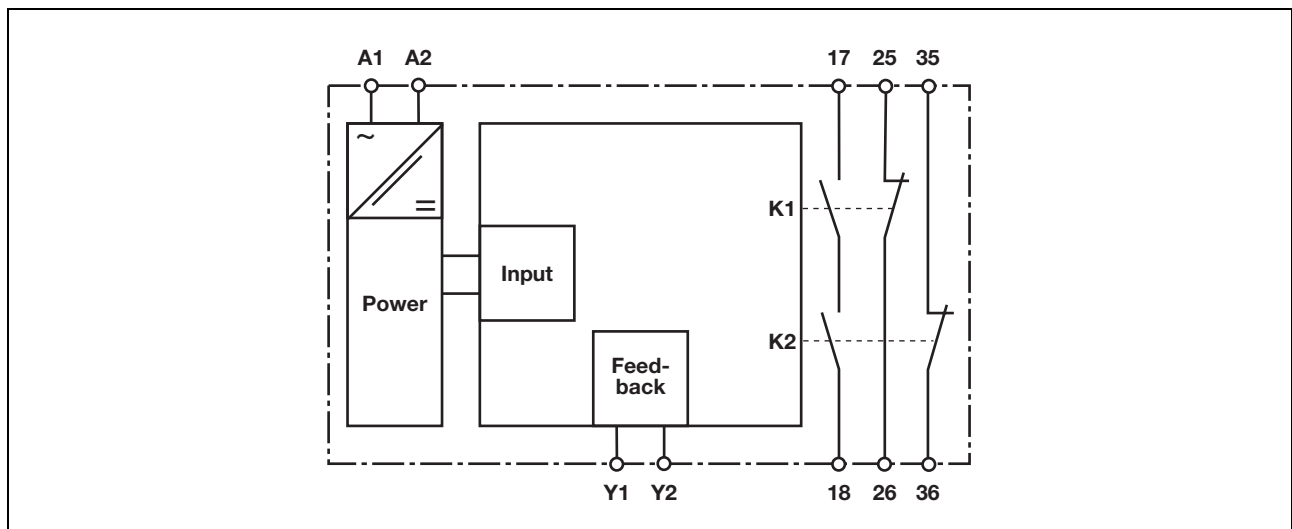

Delay-on energisation PZA


Function description

The timer is ready to start once the feedback loop is closed. If the supply

voltage at the input circuit is interrupted, the safety contact will open and the auxiliary contacts will close. If the input circuit is closed, i.e. supply volta-

ge is present, the safety contact will be closed with delay-on energisation and the auxiliary contacts will be opened.

Timing diagram

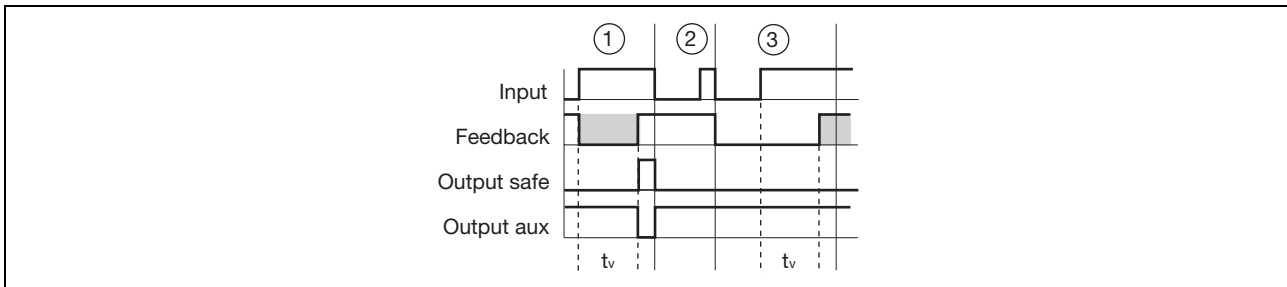

Key

- ▶ Input: Input circuit A1-A2
- ▶ Feedback: Feedback loop Y1-Y2
- ▶ Output safe: Safety contact 17-18
- ▶ Output aux: Auxiliary contacts 25-26, 35-36
- ▶ t_v : Delay time
- ①: Normal operating cycle
- ②: Fault: Input circuit opened too early
- ③: Fault: Feedback loop closed too late after t_v elapsed

Wiring


Please note:

- ▶ Information given in the "Technical details" must be followed.
- ▶ Output Terminals, safety contacts, instantaneous is a safety contact, outputs Terminals, aux. contacts, instantaneous are auxiliary contacts (e.g. for display)
- ▶ To prevent contact welding, a fuse should be connected before the output contacts (see technical details).
- ▶ Calculation of the max. cabling runs I_{max} in the input circuit:
 $R_{I_{max}}$ = max. overall cable resistance (see technical details)
 $R_{l/km}$ = cable resistance/km
- ▶ Use copper wire that can withstand 60/75 °C.
- ▶ Supply voltage 24 VDC: Shorts between the input circuit and feedback loop or earth faults in the feedback loop can damage the unit.
- ▶ We recommend the use of a short circuit-proof voltage supply with current limitation


Delay-on energisation PZA

Preparing for Operation

► Supply voltage

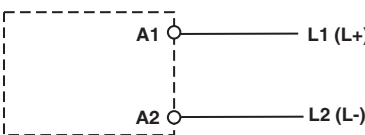
AC	
Input circuit is driven by connecting U_B	

► Feedback loop

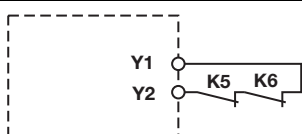Feedback loop	
Contacts from external contactors	

Delay-on energisation PZA


Terminal configuration

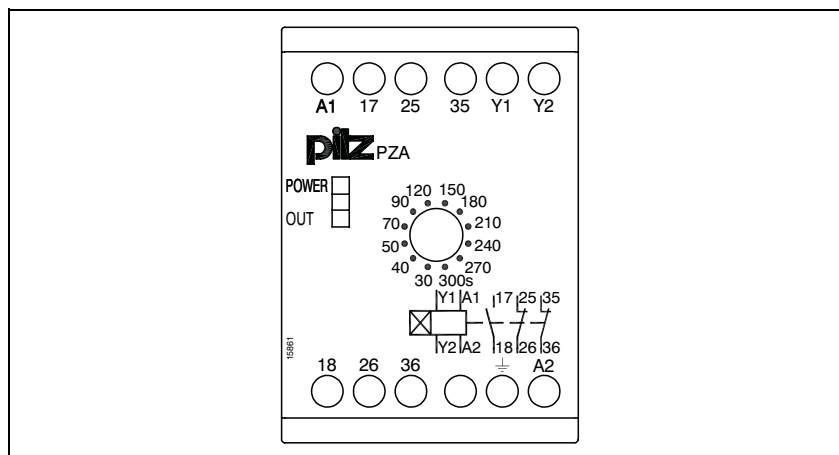

Installation

- ▶ The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- ▶ Use the notch on the rear of the unit to attach it to a DIN rail.
- ▶ Ensure the unit is mounted securely on a vertical DIN rail (35 mm) by using a fixing element (e.g. retaining bracket or an end angle).

Dimensions

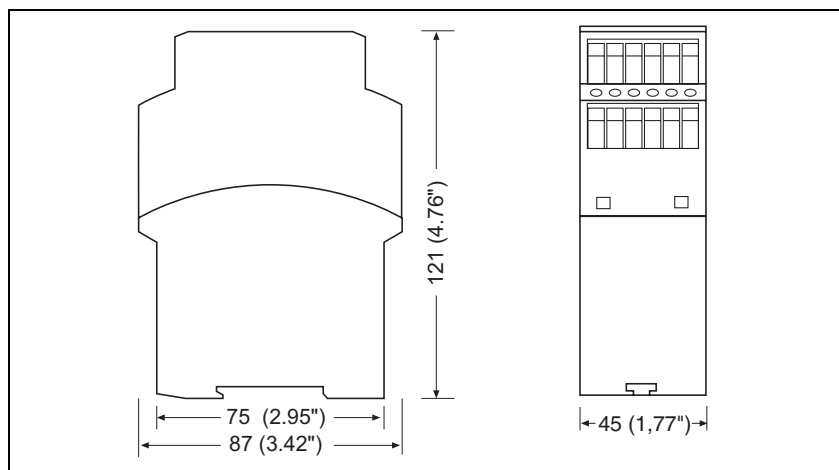


Delay-on energisation PZA

Notice

This data sheet is only intended for use during configuration. For installation and operation, please refer to the operating instructions supplied with the unit.

Service life graph

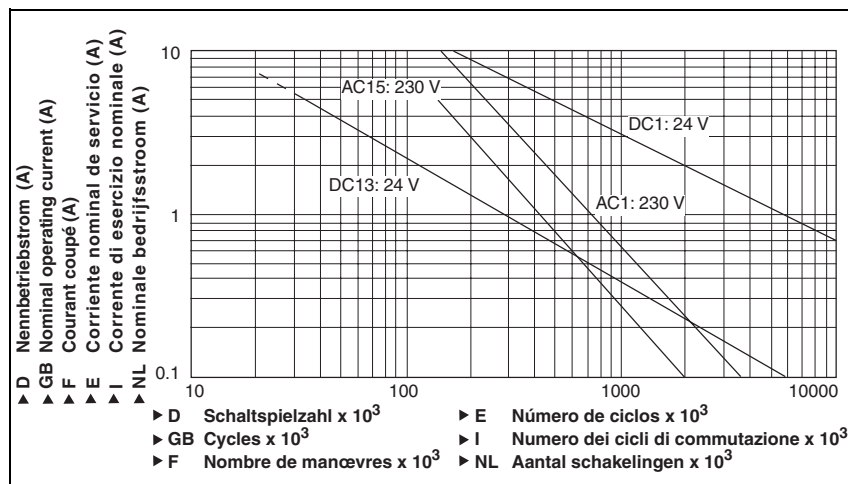

Technical details

Electrical data

Supply voltage	
Supply voltage U_B AC	24 V, 42 V, 48 V, 110 - 120 V, 230 V
Supply voltage U_B DC	24 V
Voltage tolerance	-15 %/+10 %
Power consumption at U_B AC	4.5 VA Order no.: 774020, 774021, 774023, 774026, 774031, 774032, 774035, 774038, 774040
Power consumption at U_B DC	3.0 W Order no.: 774028, 774029, 774030, 774041
Frequency range AC	50 - 60 Hz
Residual ripple DC	10 %
Voltage and current at feedback loop DC: 24.0 V	50.0 mA
Output contacts in accordance with EN 954-1	Safety contacts (N/O), delayed: 1
Category 3 Order no.: 774020, 774021, 774023, 774026, 774029, 774030, 774031, 774032, 774035, 774038, 774040, 774041	Delay time <30 s
Category 1 Order no.: 774020, 774021, 774023, 774026, 774028, 774029, 774030, 774031, 774032, 774035, 774040	Delay time >30 s
	Auxiliary contacts (N/C), delayed: 2
Utilisation category in accordance with EN 60947-4-1	
Safety contacts: AC1 at 240 V	I_{min} : 0.01 A , I_{max} : 6.00 A P_{max} : 1500 VA
Safety contacts: DC1 at 24 V	I_{min} : 0.01 A , I_{max} : 6.0 A P_{max} : 150 W
Auxiliary contacts: AC1 at 240 V	I_{min} : 0.01 A , I_{max} : 6.0 A P_{max} : 1500 VA
Auxiliary contacts: DC1 at 24 V	I_{min} : 0.01 A , I_{max} : 6.0 A P_{max} : 150 W
Utilisation category in accordance with EN 60947-5-1	
Safety contacts: AC15 at 230 V	I_{max} : 4.0 A
Safety contacts: DC13 at 24 V (6 cycles/min)	I_{max} : 3.0 A
Auxiliary contacts: AC15 at 230 V	I_{max} : 4.0 A
Auxiliary contacts: DC13 at 24 V (6 cycles/min)	I_{max} : 3.0 A
Contact material	AgSnO2 + 0.2 μm Au

Delay-on energisation PZA

Electrical data

External contact fuse protection to **EN 60947-5-1**

Blow-out fuse, quick

Safety contacts: **6 A**

Auxiliary contacts: **6 A**

Blow-out fuse, slow

Safety contacts: **4 A**

Auxiliary contacts: **4 A**

Circuit breaker 24 VAC/DC, characteristic B/C

Safety contacts: **4 A**

Auxiliary contacts: **4 A**

Times

Delay-on de-energisation **40 ms**

Recovery time at max. switching frequency 1/s
after power failure **80 ms**

Delay time t_V : selectable
**30.00 s; 40.00 s; 50.00 s; 70.00 s; 90.00 s; 120.00 s; 150.00 s;
180.00 s; 210.00 s; 240.00 s; 270.00 s; 300.00 s** Order no.:
774020

**30.00 s; 40.00 s; 50.00 s; 70.00 s; 90.00 s; 120.00 s; 150.00 s;
180.00 s; 210.00 s; 240.00 s; 270.00 s; 300.00 s** Order no.:
774021

**30.00 s; 40.00 s; 50.00 s; 70.00 s; 90.00 s; 120.00 s; 150.00 s;
180.00 s; 210.00 s; 240.00 s; 270.00 s; 300.00 s** Order no.:
774023

**30.00 s; 40.00 s; 50.00 s; 70.00 s; 90.00 s; 120.00 s; 150.00 s;
180.00 s; 210.00 s; 240.00 s; 270.00 s; 300.00 s** Order no.:
774026

**60.00 s; 80.00 s; 100.00 s; 140.00 s; 180.00 s; 240.00 s; 300.00 s;
360.00 s; 420.00 s; 480.00 s; 540.00 s; 600.00 s** Order no.:
774028

**30.00 s; 40.00 s; 50.00 s; 70.00 s; 90.00 s; 120.00 s; 150.00 s;
180.00 s; 210.00 s; 240.00 s; 270.00 s; 300.00 s** Order no.:
774029

**3.00 s; 4.00 s; 5.00 s; 7.00 s; 9.00 s; 12.00 s; 15.00 s; 18.00 s;
21.00 s; 24.00 s; 27.00 s; 30.00 s** Order no.: 774030

**3.00 s; 4.00 s; 5.00 s; 7.00 s; 9.00 s; 12.00 s; 15.00 s; 18.00 s;
21.00 s; 24.00 s; 27.00 s; 30.00 s** Order no.: 774031

**3.00 s; 4.00 s; 5.00 s; 7.00 s; 9.00 s; 12.00 s; 15.00 s; 18.00 s;
21.00 s; 24.00 s; 27.00 s; 30.00 s** Order no.: 774032

**3.00 s; 4.00 s; 5.00 s; 7.00 s; 9.00 s; 12.00 s; 15.00 s; 18.00 s;
21.00 s; 24.00 s; 27.00 s; 30.00 s** Order no.: 774035

**0.30 s; 0.40 s; 0.50 s; 0.70 s; 0.90 s; 1.20 s; 1.50 s; 1.80 s; 2.10 s;
2.40 s; 2.70 s; 3.00 s** Order no.: 774038

**3.00 s; 4.00 s; 5.00 s; 7.00 s; 9.00 s; 12.00 s; 15.00 s; 18.00 s;
21.00 s; 24.00 s; 27.00 s; 30.00 s** Order no.: 774040

**0.30 s; 0.40 s; 0.50 s; 0.70 s; 0.90 s; 1.20 s; 1.50 s; 1.80 s; 2.10 s;
2.40 s; 2.70 s; 3.00 s** Order no.: 774041

Repetition accuracy **1 %**

Environmental data

EMC **EN 60947-5-1, EN 61000-6-2**

Vibration in accordance with **EN 60068-2-6**

Frequency **10 - 55 Hz**

Amplitude **0.35 mm**

Climatic suitability **EN 60068-2-78**

Airgap creepage **EN 60947-1**

Ambient temperature **-10 - 55 °C**

Storage temperature **-40 - 85 °C**

Protection type

Mounting (e.g. control cabinet) **IP54**

Housing **IP40**

Terminals **IP20**

Delay-on energisation PZA

Mechanical data

Housing material	
Housing	PPO UL 94 V0
Front	ABS UL 94 V0
Max. cross section of external conductors with screw terminals	
1 core flexible	0.20 - 4.00 mm² , 24 - 10 AWG
2 core, same cross section, flexible:	
with crimp connectors, without insulating sleeve	0.20 - 2.50 mm² , 24 - 14 AWG
without crimp connectors or with TWIN crimp connectors	0.20 - 2.50 mm² , 24 - 14 AWG
Torque setting with screw terminals	0.60 Nm
Dimensions	
Height	87.0 mm
Width	45.0 mm
Depth	121.0 mm
Weight	260 g Order no.: 774028, 774029, 774030, 774041 350 g Order no.: 774020, 774021, 774023, 774026, 774031, 774032, 774035, 774038, 774040

The standards current on **04/04** apply.

Order reference

Type	Features	Terminals	Order no.
PZA	24 VAC	Screw terminals	774 020
PZA	42 VAC	Screw terminals	774 021
PZA	110 - 120 VAC	Screw terminals	774 023
PZA	230 VAC	Screw terminals	774 026
PZA	24 VDC	Screw terminals	774 028
PZA	24 VDC	Screw terminals	774 029
PZA	24 VDC	Screw terminals	774 030
PZA	24 VAC	Screw terminals	774 031
PZA	48 VAC	Screw terminals	774 032
PZA	110 - 120 VAC	Screw terminals	774 035
PZA	230 VAC	Screw terminals	774 038
PZA	230 VAC	Screw terminals	774 040
PZA	24 VDC	Screw terminals	774 041