

T16 Battery-Powered Rider Scrubber

- Achieve up to 20% lower cost of ownership with Tennant's quality construction and innovative technologies
- Clean anytime, anywhere with the whisper-quiet T16 at 68 dBA
- Enhance productivity and safety with unparalleled user-friendly design and Touch-n-Go™ controls



The Safe Scrubbing Alternative®

Extended Scrubbing

Lower your cost of ownership, using innovative cleaning technology that is versatile and easy to maintain – *the T16 has it all*

Less expensive to operate and maintain

The T16, equipped with Tennant's exclusive scrubbing technologies, is engineered to be up to 20% less expensive to operate and maintain than traditional scrubbing methods based on acquisition cost, consumables, maintenance, and Tennant's traditionally higher resale value.

The highest quality materials and parts go into every T16 to ensure solid construction and extend the performance life of the machine.

Whisper quiet operation

The quietest machine in our industrial rider scrubber line, the T16 allows unobtrusive cleaning anytime of the day and anywhere in the building. Operating at just 68 dBA, the T16 won't disturb customers, employees, students, patients or visitors in noise-sensitive areas.

Enhanced operator safety, comfort, and ease of use


The T16's unparalleled design provides an intuitive and operator-friendly experience. Simple patent-pending Touch-n-Go™ control module on steering wheel instills confidence and allows the operator to safely focus on keeping both hands on the wheel even while changing scrub functions. Exceptional visibility and outstanding operator comfort offer enhanced control and safety.




Tennant Technologies (optional cleaning innovations)



- *Increase safety* – high traction certified by NFSI
- *Reduce costs* – eliminate purchase of daily cleaners
- *Chemical types* – effectively replaces light- to medium-duty cleaners



- *Increase safety* – high traction certified by NFSI
- *Reduce costs* – reduce chemical usage up to 90%
- *Chemical types* – three grades of chemical from light-duty cleaner to heavy-duty degreaser



- *Increase safety* – reduce tank clean out cycles and exposure to soiled water
- *Reduce costs* – reduce water consumption and disposal by up to 66%
- *Chemical types* – all grades of chemical – mainly medium-duty cleaner to heavy-duty degreaser



Innovations increase productivity and reduce costs



Touch-N-Go™ Control Module with 1-Step™ Button – enhance safety with intuitive controls located right in front of the operator, eliminating the need to remove hands from the steering wheel to change scrub settings.



Easy to identify maintenance Touch Points ensure daily maintenance items are checked and your investment is properly maintained and protected.



Keep the operator compartment neat and tidy to achieve new levels of productivity. The side cargo net and removable tool caddy help the operator stay organized and keep the compartment free of debris.




INSIDE THE T16



A
Reduce operator fatigue and effort with a flex-shaft steering system that provides smooth and easy steering.

B
Improve handling of debris in the cleaning process with an optional dry sweeping system that captures dust in a self-contained filter bag for easy disposal.

Quality options ensure performance

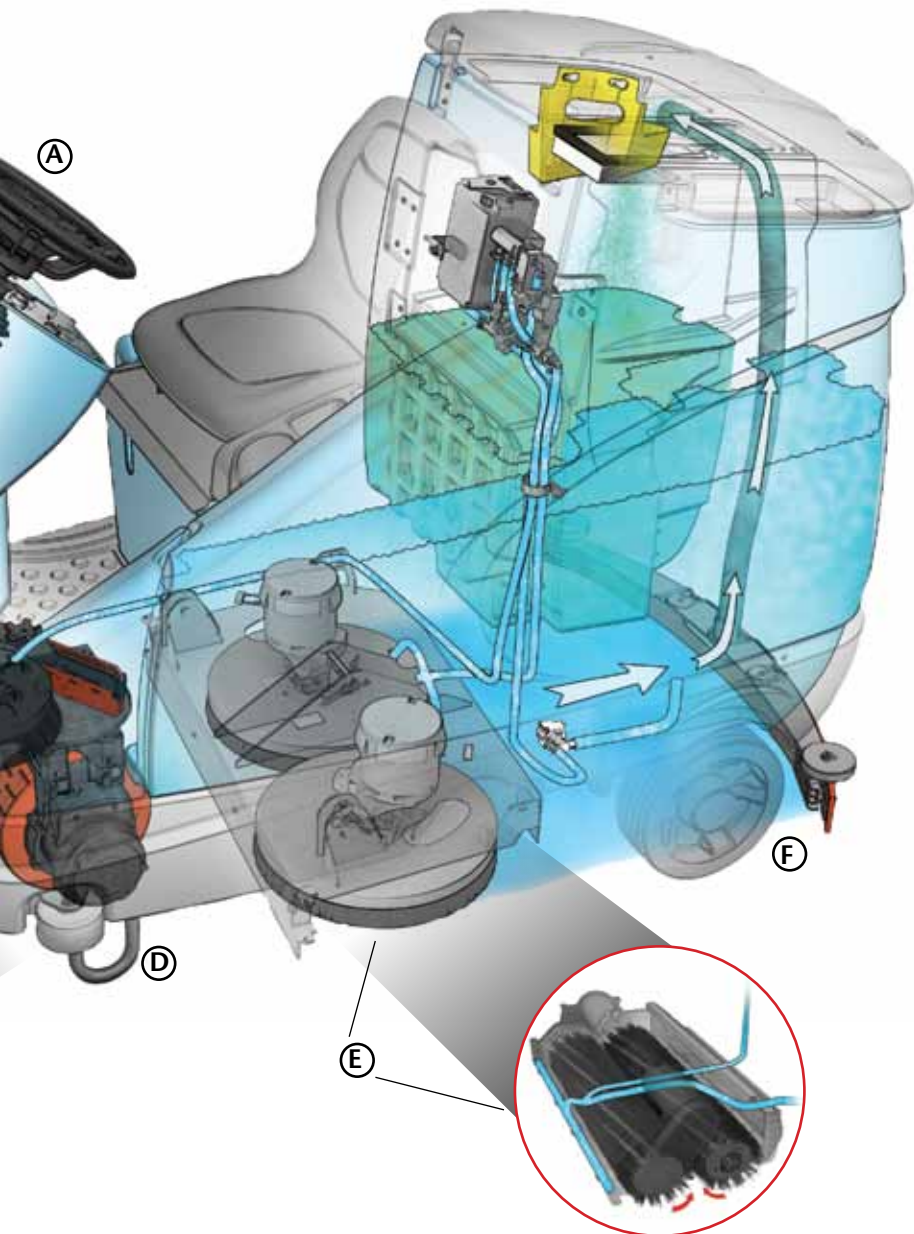

Effectively clean along edges with the scrubbing side brush that expands cleaning path for maintenance cleaning productivity.



Bring high performance spill recovery to hard-to-reach areas with the in-line telescoping vac wand.



Reduce repair costs and protect the rear squeegee when backing up with the rear squeegee protection kit.



Protect operators from falling objects with the overhead guard and protect the T16 from contact damage with the severe environment front bumper.



C

Extend component life and reduce maintenance cost with the AC brushless propelling motor that operates more efficiently than traditional DC motors

D

Reduce operating costs with robust machine construction that stands up to severe environments, but is also designed to prevent damage to walls and fragile fixtures.

E

Improve cleaning results by equipping the T16 with the scrub head that best suits the application.

F

Reduce slip/fall and maintenance costs with the Dura-Trak™ parabolic squeegee system that provides excellent water recovery and can be changed easily without tools.



OPTIMIZE CLEANING PERFORMANCE WITH TENNANTTRUE™

Maximize the uptime and life of your Tennant equipment with TennantTrue™ parts and service. Benefit from the unmatched knowledge of our team of over 400 factory-trained and certified Tennant Service Reps. Improve productivity with quality parts and supplies that are designed to enhance equipment results. Depend on TennantTrue™ to help you maximize the effectiveness of cleaning operations.

Choose GE Capital Solutions or U.S. Bank, our esteemed financial partners, for simple, quick financing with flexible upgrade options.

T16 BATTERY-POWERED RIDER SCRUBBER

FEATURES

Scrubbing System

Cleaning path	36 in	910 mm
With scrubbing side brush	45 in	1,145 mm
With sweeping side brush (cylindrical only)	46 in	1,170 mm
With dual side sweep brushes (presweep only)	46 in	1,170 mm

Disk scrub head

Speed		300 rpm
Down pressure weight (variable to)	250 lb	114 kg
Brush diameter (2)	18 in	460 mm
Brush motor (2)	1.0 hp	0.75 kW

Cylindrical scrub head

Speed		500 rpm
Down pressure weight (variable to)	200 lb	91 kg
Brush diameter (2)	8 in	205 mm
Brush motor (2)	1.0 hp	0.75 kW

Tanks

Solution tank	50 gal	190 L
Solution capacity with ES®	75 gal	280 L
Recovery tank	60 gal	225 L
Demisting chamber	10 gal	38 L
Vacuum fan	0.75 hp	0.56 kW
Speed		14,000 rpm
Water lift	65 in	1,650 mm

Propelling System

Propel speed forward (variable to)	5.6 mph	9 km / h
Propel speed reverse (variable to)	2.5 mph	4 km / h
Propel motor	1.6 hp	1.2 kW

Gradeability

Transport at gross weight	8 deg/14.1%
Working (scrubbing)	4 deg/7%

Machine Dimensions

Length	74 in	1,880 mm
Width	41 in	1,040 mm
Rear squeegee (hard width)	42 in	1,070 mm
Height	58 in	1,475 mm
With overhead guard	82 in	2,080 mm
Weight	1,100 lb	500 kg
With standard 235 AH batteries	1,900 lb	860 kg
Minimum aisle turn	83 in	2,110 mm

Sound Level

Operator's ear	
Disk: Mode #1	68 dBA
Cylindrical: Mode #1	71 dBA
(Sound pressure level tested per ISO 11201 as recommended by the AACEM and OSHA)	

Warranty

See your local representative for warranty information

SEEING IS BELIEVING

See for yourself how the T16 scrubber delivers clean, safe floors in your most challenging environments. For additional information, call **800.553.8033**.

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

www.tennantco.com
info@tennantco.com