

SAVE ENERGY SAVE EARTH



LED COVE LIGHT

LED Strip Light is an indirect LED lamp with low power consumption, practicality and natural light. It can be easily mounted in a narrow space with its slim design with Fixture. Low profile connector makes connection easy between lamps and enables it to be used for various purposes.

Applications

- Showcase Lighting
Under Cabinets, Shelf Lighting
- Museums Lighting
Direct Lighting, Indirect Lighting

Features

- Long Life, High Efficiency, Environmentally Friendly
- Slim Size
- Easy to connect each Strip-Light
- Operating Temp. : -20 ~ 50°C
- Life Time : 50,000 hrs.
- 3 Angle Adjustable.
- Platinum Set : IP65
- Input Voltage : 12 Vdc.




PLATINUM SERIE




GOLD SERIE




INSTALLATION GUIDE

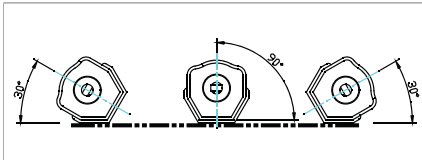


INSTALLATION GUIDE

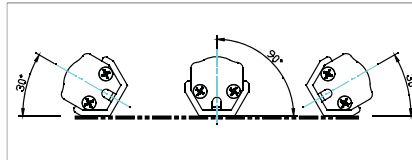

DIMENSION (mm.)

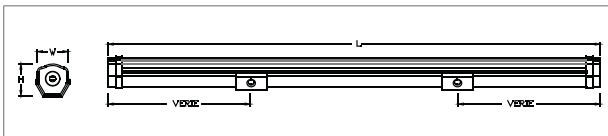

DIMENSION (mm.)

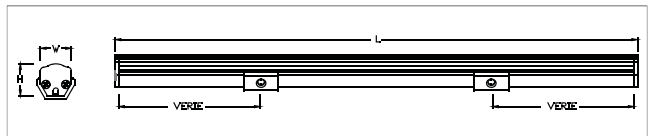

Product Code	Model	Power	Length	Flux(lm)	Color	CCT
30CV200104GC120W	PLATINUM	1.44 W	11 cm	100	Cool White	7,100 K
30CV200004GC120W		4.32 W	31 cm	300		
30CV200009GC120W		8.64 W	61 cm	600		
30CV200014GC120W		14.40 W	101 cm	1,000		
30CV200017GC120W		17.82 W	121 cm	1,200		
30CV200022GC120W		21.60 W	151 cm	1,500		
30CV200104GW120W		1.44 W	11 cm	100	Warm White	3,000 K
30CV200004GW120W		4.32 W	31 cm	300		
30CV200009GW120W		8.64 W	61 cm	600		
30CV200014GW120W		14.40 W	101 cm	1,000		
30CV200017GW120W		17.82 W	121 cm	1,200		
30CV200022GW120W		21.60 W	151 cm	1,500		
30CV100104GC120N	GOLD	1.44 W	11 cm	100	Cool White	7,100 K
30CV100004GC120N		4.32 W	31 cm	300		
30CV100009GC120N		8.64 W	61 cm	600		
30CV100014GC120N		14.40 W	101 cm	1,000		
30CV100017GC120N		17.82 W	121 cm	1,200		
30CV100022GC120N		21.60 W	151 cm	1,500		
30CV100104GW120N		1.44 W	11 cm	100	Warm White	3,000 K
30CV100004GW120N		4.32 W	31 cm	300		
30CV100009GW120N		8.64 W	61 cm	600		
30CV100014GW120N		14.40 W	101 cm	1,000		
30CV100017GW120N		17.82 W	121 cm	1,200		
30CV100022GW120N		21.60 W	151 cm	1,500		