

Trumpet shaped gland

### Technical data

#### Ex-e trumpet shaped cable gland

Marking to 94/9/EC	⊕ II 2 G Ex e II / ⊕ II 2 D Ex tD A21 IP66
EC-Type Examination Certificate	PTB 00 ATEX 3121
Permissible ambient temperature	-40 °C to +85 °C -50 °C to +80 °C option <sup>1)</sup>
Degree of protection accd. EN 60529	IP66
Enclosure material	Polyamide

### Ordering details

Thread	E mm	L1 mm	L2 mm	Ø Cable mm	A/F mm	Weight approx. kg	OU	Order No.
Ordering details trumpet shaped cable gland								
M20 x 1.5	47	64	15	8 – 13	26	0.057	10	<b>GHG 960 1949 R0111</b>
M25 x 1.5	51	65	15	11 – 16	32	0.070	10	<b>GHG 960 1949 R0112</b>
M32 x 1.5	68	80	15	15 – 20	41	0.140	10	<b>GHG 960 1949 R0113</b>
M40 x 1.5	81	86	15	19 – 27	50	0.194	10	<b>GHG 960 1949 R0114</b>
M50 x 1.5	96	95	16	26 – 34	60	0.333	1	<b>GHG 960 1949 R0115</b>
M63 x 1.5	107	105	16	35 – 46	75	0.742	1	<b>GHG 960 1949 R0116</b>


Trumpet shaped glands and reducing rings with PG-thread are available on request.

The order No. will show 1 pcs.

Please note that only order units (OU) can be ordered.

<sup>1)</sup> Low temperature version on request

### Dimension drawing

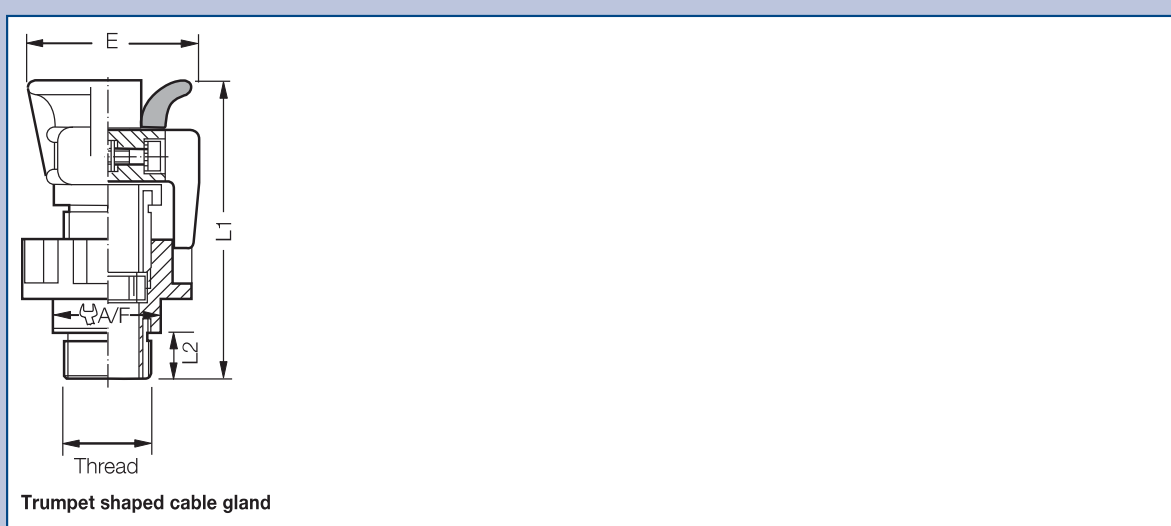

Trumpet shaped cable gland

Dimensions in mm