



Cable gland type


For unarmoured cable

Cable type

Non-armoured cable or armoured cable (does not terminate the armour)

Certifications and Compliances


- ATEX LCIE 97 ATEX 6008X – Exd IIC/Exe II/ Ex tD /Ex II 2 GD
- IECEx LCI 05.0004X
- cULus Listed for Class I Zone 2 AEx e II/Ex e II
- cULus Marine Listed for Class I Zone 1 AEx e II /Ex e II
- NEMA 4X and IP68
- CEPEL-EX-558/05X
- GOST-R POCC FR.B02011
- NEPSI N° GYJ071336U & GYJ071337U
- ABS approbation: N° 10-HS 577243-PDA / P 1836754-X

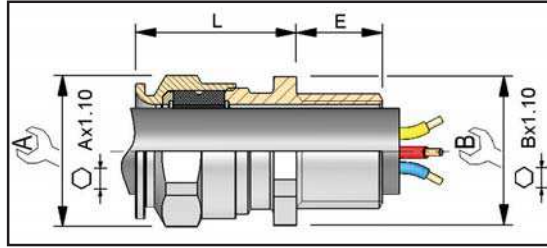

Features:

- Standard material is nickel-plated brass for superior corrosion resistance.
- Provides a weatherproof seal on the outer sheath of the cable.
- Standard neoprene seal suitable for use in operating temperatures ATEX -60°C to +100°C.
- Available with optional silicone seal for extreme temperatures.
- Available with metric or NPT threads.
- See page 172 for additional clamping.
- See pages 180 to 186 for related accessories.

ORDERING EXAMPLE:



OPTIONS (replace last digit with option number):

- 9 Stainless steel (316L)
- 8 Bronze
- 7 Aluminum
- 5 Silicone bague sealing ring with temperature range of -70°C to +220°C

GLAND SIZE	ENTRY THREAD SIZE				LENGTH E ISO/ (NPT)	OUTER SHEATH		L	HEXAGON	
	ISO	Reference	NPT	Reference		Min	Max		A	B
4	12*	CAP816404	1/4"*	CAP818404	15 (12.0)	4.0	8.0	20	15	15
4	16*	CAP816594	3/8"*	CAP818594	15 (12.0)	4.0	8.5	20	15	19
5	16*	CAP816504	3/8"*	CAP818504	15 (12.0)	6.0	12.0	22	19	19
4	20	CAP816674	1/2"	CAP818674	15 (20.2)	4.0	8.5	20	15	24
5	20	CAP816694	1/2"	CAP818694	15 (20.2)	6.0	12.0	22	19	24
6	20	CAP816604	1/2"	CAP818604	15 (20.2)	8.5	16.0	25	24	24
5	25	CAP816774	3/4"	CAP818774	15 (20.2)	6.0	12.0	22	19	30
6	25	CAP816794	3/4"	CAP818794	15 (20.2)	8.5	16.0	25	24	30
7	25	CAP816704	3/4"	CAP818704	15 (20.2)	12.0	21.0	27	30	30
7	32	CAP816894	1"	CAP818894	15 (25.3)	12.0	21.0	27	30	41
8	32	CAP816804	1"	CAP818804	15 (25.3)	16.0	27.5	34	41	41
8	40	CAP816994	1-1/4"	CAP818994	15 (26.0)	16.0	27.5	34	41	48
9	40	CAP816904	1-1/4"	CAP818904	15 (26.0)	21.0	34.0	36	48	48
9	50	CAP817094	1-1/2"	CAP819094	15 (26.5)	21.0	34.0	36	48	55
10	50	CAP817004	1-1/2"	CAP819004	15 (26.5)	27.0	41.0	39	55	55
11	63	CAP817294	2"	CAP819294	17 (27.2)	33.0	48.0	41	64	64
12	63	CAP817204	2"	CAP819204	17 (27.2)	40.0	56.0	43	72	72
12	75	CAP817394	2-1/2"	CAP819494	18 (40.5)	40.0	56.0	43	72	85
13	75	CAP817304	2-1/2"	CAP819404	18 (40.5)	47.0	65.0	49	85	85
14	90	CAP817594	3"	CAP819594	22 (42.0)	54.0	74.0	56	95	95
15	90	CAP817504	3"	CAP819504	22 (42.0)	63.0	78.0	61	110	110
16	110	CAP817794	3-1/2"	CAP819604	22 (43.2)	72.0	92.0	62	120	120

* Uncertified UL // sizes n°4 et 5, no UL marine