



### Cable gland type


For armoured cable

### Cable type

Steel wire armoured cable, steel wire braided, steel tape armoured, braided marine shipboard

### Certifications and Compliances

- ATEX LCIE 97 ATEX 6008X – Exd IIC/Exe II/ Ex tD /Ex II 2 GD
- IECEx LCI 05.0004X
- NEMA 4X and IP68
- CEPTEL cepel-EX-558/05X (pending)
- GOST-R POCC FR.B02011 (pending)
- ABS approbation : N° 10-HS 577243-PDA / P 1836754-X

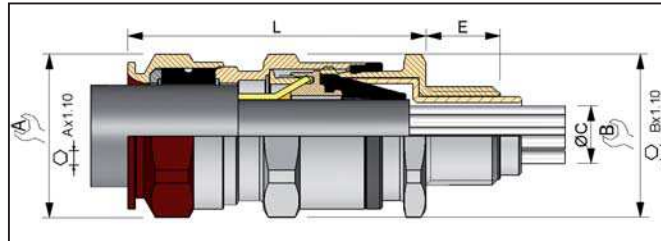

### Features:

- Standard material is nickel-plated brass for superior corrosion resistance
- Resumption of armour without reversible components.
- Provides flameproof seal on the bits and the inner sheath of the armoured cables.
- Provides a weatherproof seal on the outer sheath of the armoured cable.
- Fully inspectable armour clamping and crimping including deluge boot.
- Signalitique: red stopping plug.
- Neoprene seal and resin certify in the range of temperature ATEX -60°C to +80°C.
- Available with metric or NPT threads.
- See page 172 for additional clamping.
- See pages 180 to 186 for related accessories.

ORDERING EXAMPLE:	
CAP56959	4
Gland Type	Options

OPTIONS (replace last digit with option number):	
9	Stainless steel (316L)
8	Bronze
7	Aluminum

GLAND SIZE	ENTRY THREAD SIZE				LENGTH E ISO / (NPT)	CABLE				L	HEXAGON		COND	
	ISO	Reference	NPT	Reference		INNER SHEATH		CONDUCTOR			A	B		
						Min	Max	Ø Max	Max number					
4	16	CAP569594	3/8	CAP571594	15 (12)	4	7,5	6,5	5 X	Ø1,5	36	15	19	40
4	20	CAP569674	1/2	CAP571074	15 (22,2)	4	7,5	6,5	5 X	Ø1,5	36	15	24	40
5	20	CAP569674	1/2	CAP571674	15 (22,2)	6,5	11	9,5	5 X	Ø2,5	42	19	24	40
6	20	CAP569694	1/2	CAP571694	15 (22,2)	9	14,5	12	8 X	Ø2,5	48	24	30	40
6	25	CAP569704	3/4	CAP571704	15 (22,5)	9	14,5	12	8 X	Ø2,5	48	24	30	40
7	25	CAP569794	3/4	CAP569794	15 (22,5)	12	19,5	17	12 X	Ø2,5	58	30	41	30