




Cable gland type
For unarmoured cable
Cable type
Non-armoured cable

Certifications and Compliances

- ATEX LCIE 97 ATEX 6008X – Exd IIC/Exe II/ Ex tD /Ex II 2 GD
- IECEx LCI 05.0004X
- NEMA 4X and IP68
- ABS approbation : N° 10-HS 577243-PDA / P 1836754-X

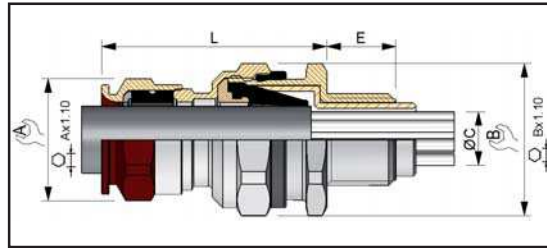

Features:

- Standard material is nickel-plated brass for superior corrosion resistance
- Provides flameproof seal on the strands and the outer sheath of the unarmoured cables.
- Signalitique: red cap nut.
- Neoprene seal and resin certify in the range of temperature ATEX -60°C to +80°C.
- Available with metric or NPT threads.
- See page 172 for additional clamping.
- See pages 180 to 186 for related accessories.

ORDERING EXAMPLE:

CAP51959 4

Gland Type

Options

OPTIONS (replace last digit with option number):

- 9 Stainless steel (316L)
- 8 Bronze
- 7 Aluminum

GLAND SIZE	ENTRY THREAD SIZE				LENGTH E ISO / (NPT)	CABLE				L	HEXAGON		COND	
	ISO	Reference	NPT	Reference		INNER SHEATH		CONDUCTOR			A	B		
						Min	Max	Ø Max	Max number					
4	16	CAP519594	3/8	CAP511594	15 (12)	4	7,5	6,5	5 X	Ø1,5	36	15	19	40
4	20	CAP519674	1/2	CAP511674	15 (22,2)	4	7,5	6,5	5 X	Ø1,5	36	15	24	40
5	20	CAP519694	1/2	CAP511694	15 (22,2)	6,5	11	9,5	5 X	Ø2,5	42	19	24	40
6	20	CAP519604	1/2	CAP511604	15 (22,2)	9	14,5	12	8 X	Ø2,5	48	24	30	40
6	25	CAP519794	3/4	CAP511794	15 (22,5)	9	14,5	12	8 X	Ø2,5	48	24	30	40
7	25	CAP519704	3/4	CAP511704	15 (22,5)	12	19,5	17	12 X	Ø2,5	58	30	41	30