





Cable gland type
For unarmoured cable • Barrier gland

Cable type
Non-armoured cable

Certifications and Compliances


- ATEX LCIE 97 ATEX 6008X – Exd IIC/Exe II/ Ex tD /Ex II 2 GD
- IECEx LCI 05.0004X
- NEMA 4X and IP68
- ABS approbation : N° 10-HS 577243-PDA / P 1836754-X

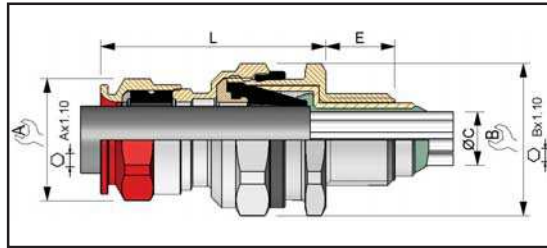

Features:

- Standard material is nickel-plated brass for superior corrosion resistance
- Provides flameproof seal on the strands and the outer sheath of the unarmoured cables.
- Signalitique: red cap nut.
- Neoprene seal and resin certify in the range of temperature ATEX -60°C to +80°C.
- See page 172 for additional clamping.
- Available with metric or NPT threads.
- See pages 180 to 186 for related accessories.

ORDERING EXAMPLE:

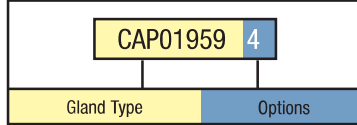

OPTIONS (replace last digit with option number):

- 9 Stainless steel (316L)
- 8 Bronze
- 7 Aluminum

GLAND SIZE	ENTRY THREAD SIZE				LENGTH E ISO / (NPT)	CABLE					L	HEXAGON	
	ISO	Reference	NPT	Reference		INNER SHEATH		CONDUCTOR				A	B
						Min	Max	Ø Max	Max number				
4	16	CAP019594	3/8"	CAP011594	15 (12)	4	7,5	6,5	6 X	Ø1,5	36	15	19
4	20	CAP019674	1/2"	CAP011674	15 (22,2)	4	7,5	6,5	6 X	Ø1,5	36	15	24
5	20	CAP019694	1/2"	CAP011694	15 (22,2)	6,5	11	9,5	6 X	Ø2,5	42	19	24
6	20	CAP019604	1/2"	CAP011604	15 (22,2)	9	14,5	12	10 X	Ø2,5	48	24	30
6	25	CAP019794	3/4"	CAP011794	15 (22,5)	9	14,5	12	10 X	Ø2,5	48	24	30
7	25	CAP019704	3/4"	CAP011704	15 (22,5)	12	19,5	17	21 X	Ø2,5	58	30	41
7	32	CAP019894	1"	CAP011894	15 (27,3)	12	19,5	17	21 X	Ø2,5	58	30	41
8	32	CAP019804	1"	CAP011804	15 (27,3)	17,5	26	23	42 X	Ø2,5	70	41	48
8	40	CAP019994	1 1/4"	CAP011994	15 (28)	17,5	26	23	42 X	Ø2,5	70	41	48
9	40	CAP019904	1 1/4"	CAP011904	15 (28)	23	33	29	60 X	Ø2,5	79	48	55
9	50	CAP019094	1 1/2"	CAP011094	16 (28,5)	23	33	29	60 X	Ø2,5	79	48	55
10	50	CAP019004	2"	CAP011004	16 (29,2)	28,5	41	36,5	80 X	Ø3	88	55	64
10	63	CAP019204	/	/	16	28,5	41	36,5	80 X	Ø3	88	55	67