


Ex-protected portable power supply units

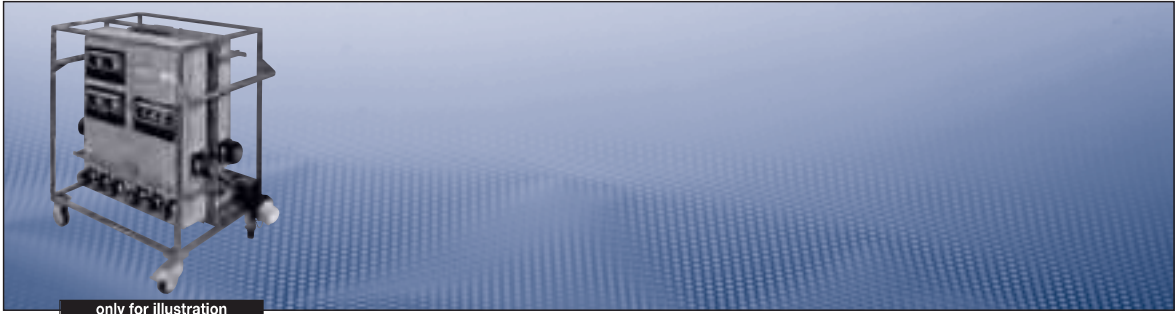

only for illustration

Technical data

Ex-protected portable power supply EXKO 233201 A0016

Marking accd. to 94/9/EC	Ⓔ II 2 G Ex de IIC T4 / Ⓔ II 2 D IP65 T95°C
EC-Type Examination Certificate	PTB 99 ATEX 1044
Permissible ambient temperature	-20 °C up to +40 °C
Rated voltage	400 V / 230 V
Rated current	32 A
Frequency	50 Hz
External back up fuse	32 A gL / gG
Insulation class	I
Degree of protection accd. to IEC 60529	IP65
Cable glands	1x M32 trumpet shaped cable gland, 1x M12 cable gland plastic
Anschlusskabel	H07RN-F 5 x 6mm ² with plug 32A, 3 m
Enclosure material	sheet steel, painted (optional: Edelstahl AISI 316L), wall socket: glass-fibre reinforced polyester, plug: polyamide
Dimensions (H x W x D)	metal frame stainless steel squared 20 x 20 x 2 including lockable wheels 1019 x 800 x 600 mm
Weight	69 kg
Enclosure colour	RAL 7032

Ordering details

Components	Components external	Order No.
1x MCB S204M - C32A, 10kA	1x plug 32A 5-pole, 380-415V (06h) (GHG5127506R0001)	
1x RCD F204A - 40A 0,03A 10kA	1x receptacle 32A 5-pole, 380-415V (06h) (GHG5128506R0001)	
3x MCB / RCD DS971 - C16A 0,03A, 10kA	6x receptacle 16A 3-pole, 230V (06h) (GHG5118306R0001)	
	actuating flap for components	EXKO 233201 A0016


Option:

padlock facility for enclosure cover

Enclosure material sheet steel, painted oder stainless steel AISI 316L

Customized solution for connection cable, plugs & sockets and rated voltage

Dimension drawing

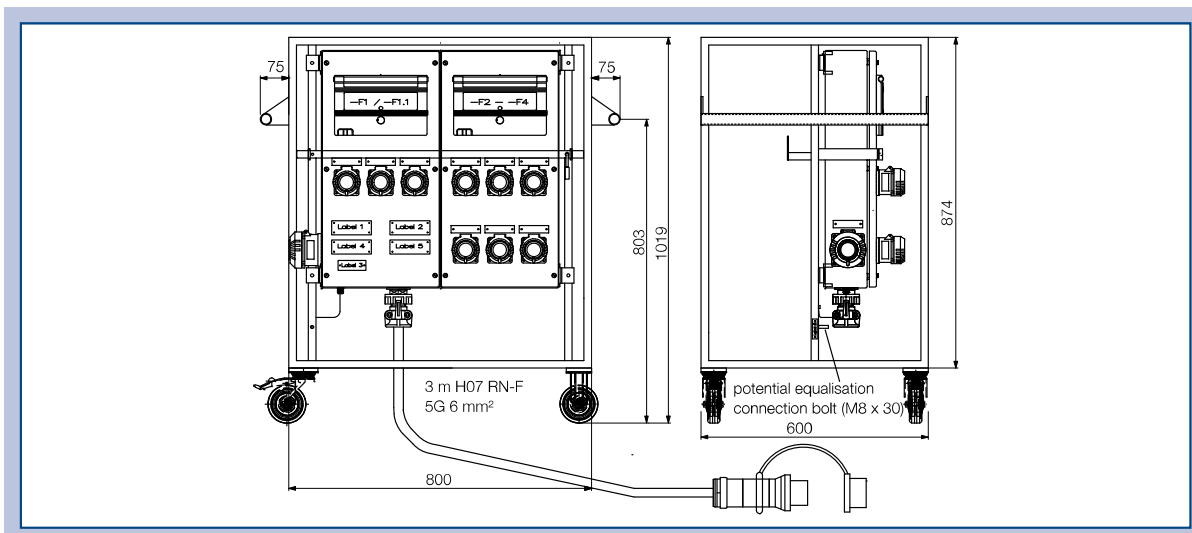

Dimensions in mm