


Ex-protected portable power supply units

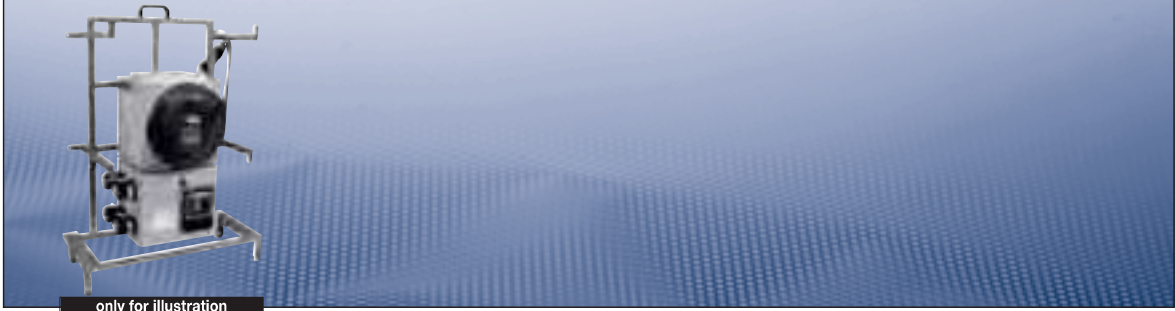

Technical data

Ex-protected portable power supply EXKO 233201 A0025

Marking accd. to 94/9/EC	Ex II 2 G Ex de IIC T4
EC-Type Examination Certificate	PTB 99 ATEX 1057
Permissible ambient temperature	-20 °C up to +40 °C
Rated voltage	230/24 V transformer, 400 VA
Rated current	16 A
Frequency	50 Hz
External back up fuse	16 A gL / gG
Insulation class	I
Degree of protection accd. to IEC 60529	IP65
Cable glands	1x M25 trumpet shaped cable gland, 1 x M12 cable gland plastic
Connection cable	H07RN-F 3 x 2.5 mm ² with plug 16 A, 3 m
Enclosure material	Ex-d enclosure: die-cast aluminium, Connection box: stainless steel AISI 316L wall socket: glass-fibre reinforced polyester, plug: polyamide
Dimensions (H x W x D)	metal frame stainless steel squared 20 x 20 x 2 including lockable wheels 936 x 720 x 369 mm
Weight	62 kg
Enclosure colour	RAL 7032

Ordering details

Components	Components external	Order No.
1 x MCB S202M - C10A, 10kA	1 x plug 16A 3-pole, 230V (06h) (GHG5117306R0001)	
1 x MCB S202M - C13A, 10kA	4 x wall socket 16A 3-pole, 24V (01h) (GHG5118301R0001)	
1 x power supply 230V AC / 24V DC 20A	actuating flap for components	EXKO 233201 A0025


Option:

padlock facility for enclosure cover

Enclosure material sheet steel, painted oder stainless steel AISI 316L

Customized solution for connection cable, plugs & sockets and rated voltage

Dimension drawing

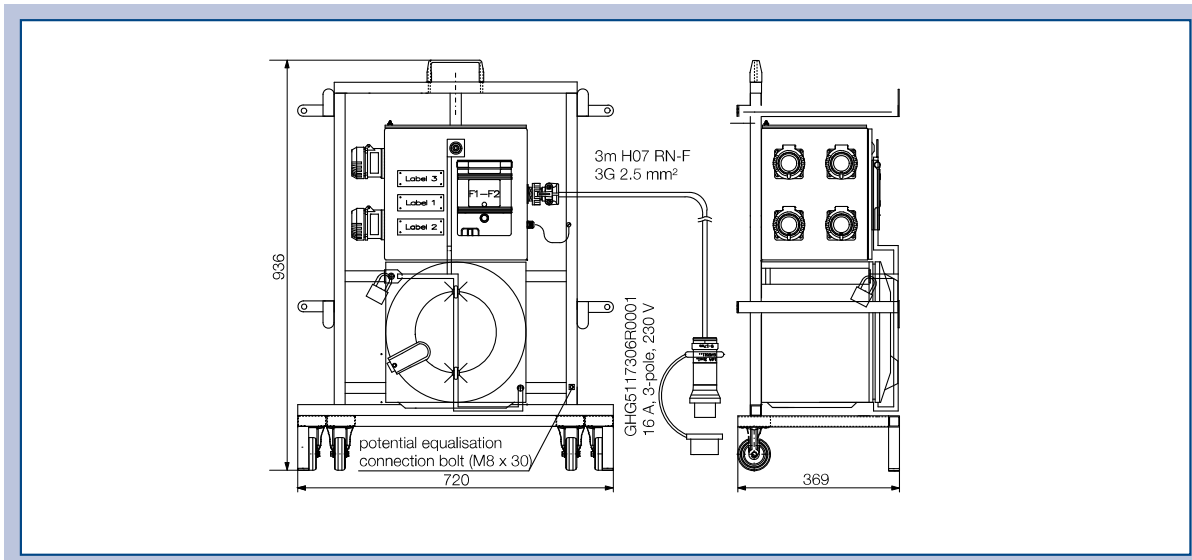

Dimensions in mm