


CIR-BA31FF

Weatherproof IR Colour Camera

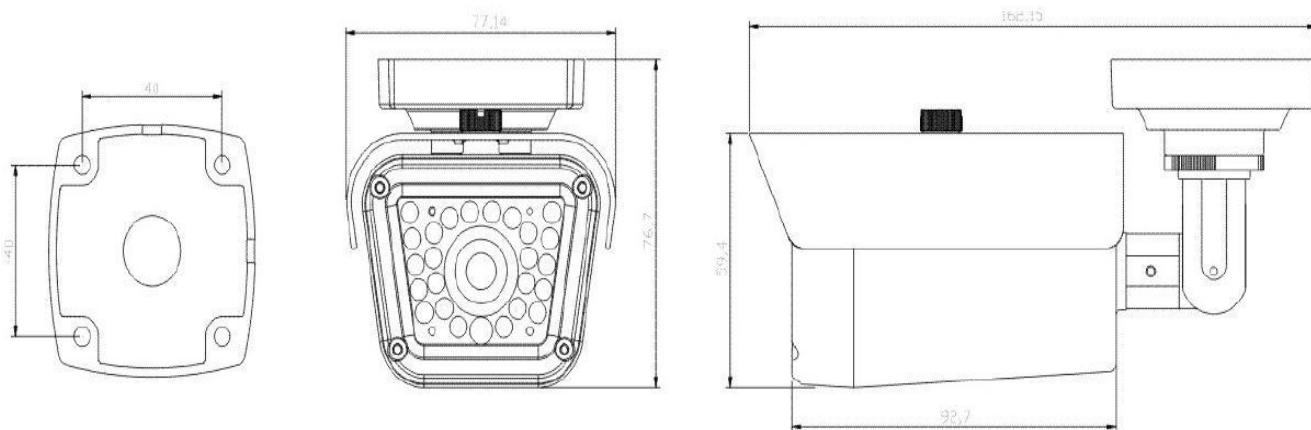

FEATURES

- 1. 650TVL, 1/3" 960H Color Sony CCD
- 2. 3.6mm Board lens
- 3. Color changes to B/W while IR LED starts working
- 4. Cable management: cable through bracket
- 5. LEN ATW
- 6. Maximum outdoor IR range: 15M

Remark: Non-regulative adaptor may cause camera damaged.

ACCESSORIES

- Camera.....X1
- User Manual.....X1
- Screw X4
- Plastic-Conical-Anchor..... X4
- Hexagonal Wrench.....X2
- Mounting drawing paper.....X1
- DC Connector..... X1

SPECIFICATION

| Item | CIR-BA31FF |
|-----------------------|--|
| IP rating | IP66 |
| Type | Colour/Monochrome |
| Image Sensor | 1/3" 960H Colour Sony CCD |
| Pixels | NTSC:1020(H)×508;PAL:1020(H)×596(V) |
| Horizontal Resolution | 650 TVL |
| IR LED | 24PCs IR LED |
| Vertical frequency | NTSC:60Hz PAL:50Hz |
| Horizontal Frequency | NTSC:15.734KHz PAL:15.625KHz |
| Clock Frequency | NTSC/PAL:36 MHz |
| Scanning System | 2:1 Interlace |
| S / N Ratio | ≥52dB |
| Electronic Shutter | NTSC:1/60-1/100,000s PAL:1/50-1/100,000s |
| White Balance | ATW |
| Back Light | OFF |
| Compensation | ON |
| Auto Gain Control | ON |
| Gamma | 0.45 |
| Video Output | 1V p-p,75Ω |
| Lens | 3.6mm Board lens |
| Viewing Angle | Horizontal: 74° |
| Power Supply | DC12V±10% |
| Current Consumption | 270mA |
| Available IR Distance | 15M |
| Dimension | 170×77×82mm (6.38"×3.03"×3.03") |
| Weight | 450g |
| Storage Temperature | -30~+60°C (-22~+140°F) |
| Operating Temperature | -30~+40°C (-22~+104°F) |

PACKAGE

| | |
|---------------------------|---------------|
| Weight | 590g |
| Dimension | 162×77×77mm |
| Quantity per carton | 30PCs |
| Dimension of carton..... | 385×335×620mm |
| Weight of carton..... | 18.2KGs |