

DH-DVR2404/3204HF-S

24/32CH D1 2U Standalone DVR



Features

- > Up to 24/32 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > 2404/3204HF-S :Full channel@D1(4CIF) realtime recording
- > HDMI/VGA/TV/Spot simultaneous video output
- > All channel simultaneous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-DVR2404/3204HF-S


Specifications

Model		DVR2404HF-S	DVR3204HF-S
System			
Main Processor	Dual-core embedded processor		
Operating System	Embedded LINUX		
Video			
Input	24 channel, BNC	32 channel, BNC	
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Audio			
Input	16 channel, BNC		
Output	1 channel, BNC		
Two-way Talk	1 channel Input, 1 channel Output, BNC		
Display			
Interface	1 HDMI, 1 VGA, 1 TV, 1 Spot, BNC		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4/8/9/16/25	1/4/8/9/16/25/36	
Privacy Masking	4 rectangular zones (each camera)		
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording			
Video/Audio Compression	H.264/G.711		
Resolution	D1/4CIF(704×576/704×480) / HD1(352×576/352×480) / 2CIF(704×288/704×240) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream:	D1/2CIF/CIF(1~25/30fps)	
	Extra Stream	CIF/QCIF(1~25/30fps)	
Bit Rate	48~3072Kb/s		
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	16 channel		
Relay Output	6 channel		
Playback & Backup			
Sync Playback	1/4/8/9/16		
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		

DH-DVR2404/3204HF-S

Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/eSATA Device/Internal SATA burner/Network
Network	
Ethernet	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, Alarm Server
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	8 SATA ports (8HDDs or 6HDDs+1CD/DVD-RW), up to 32TB
External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB
Auxiliary Interface	
USB Interface	4 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC100~240V, 50/60Hz
Power Consumption	40W (without HDD)
Working Environment	-10°C ~ +55°C/10%~90%RH/86~106kpa
Dimension(W×D×H)	2U, 440mm×460mm×89mm
Weight	6.5KG(without HDD)

System Connection

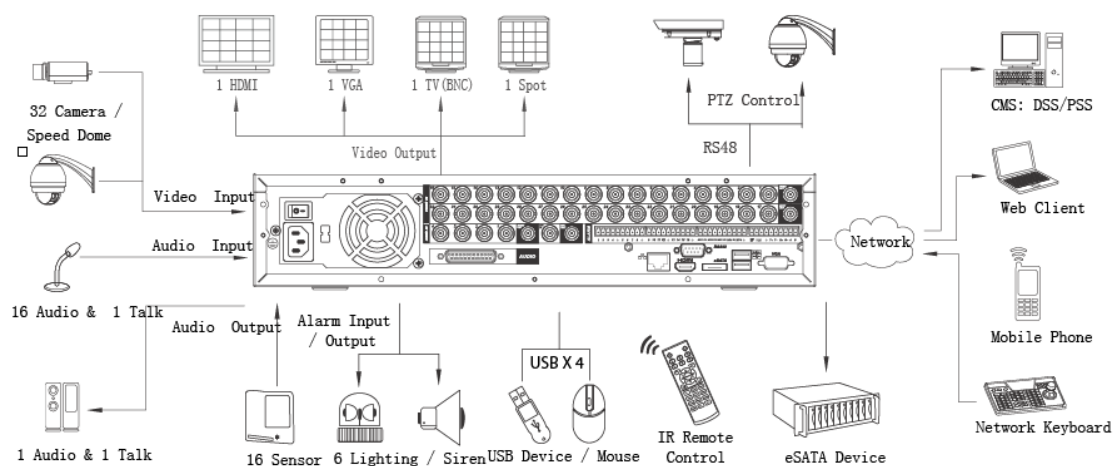

*Takes 3204HF-S as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

DH-DVR2404/3204HF-S

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.