



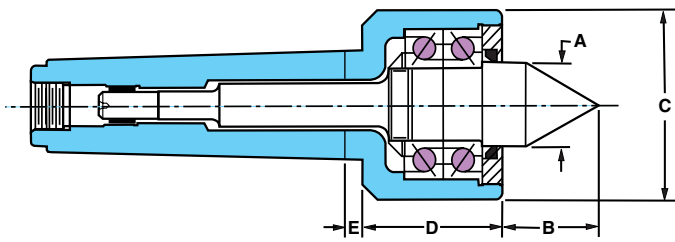


Regal Live Centers

Standard and Long Point

- Accuracy guaranteed to $\pm .00005$
- Points are through-hardened to 61-63 Rc
- Full-length spindle for extra rigidity
- Two angular contact bearings for superior performance in a compact design
- Body heat-treated for additional strength
- Long point configuration allows for tool clearance
- Riten full service and repair

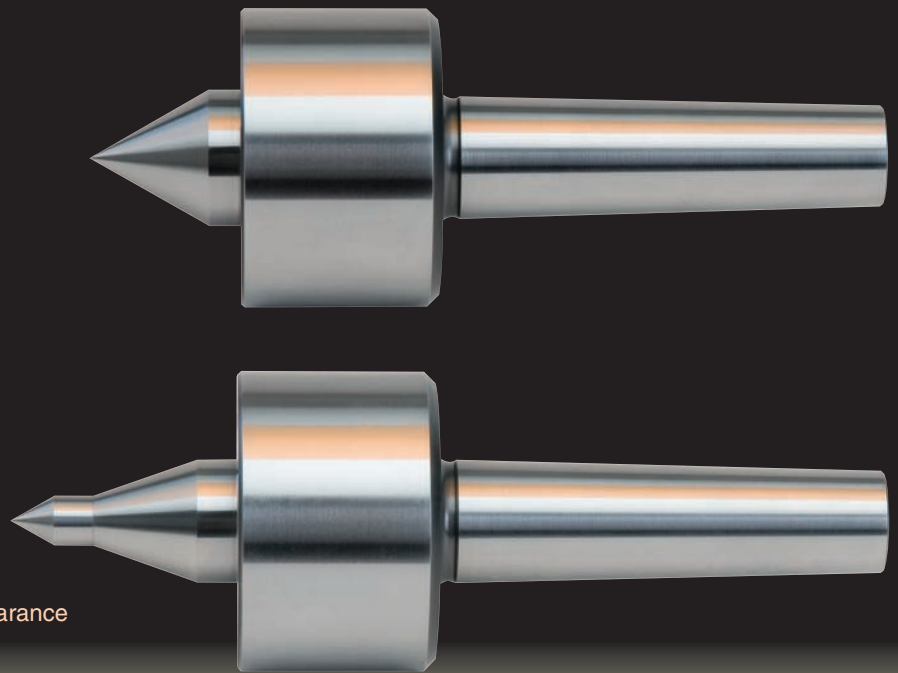

Standard Point

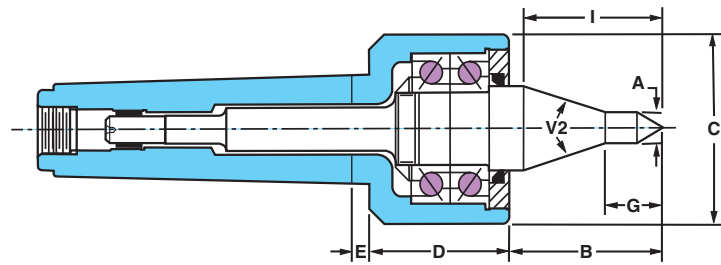

Long Point

STANDARD POINT – MORSE TAPER

Model	MT	A	B	C	D	E	Max. RPM	W. P. Weight
48602	2	1	1 1/4	2 3/8	1 3/4	1/4	4000	440
48603	3	1	1 1/4	2 3/8	1 3/4	1/4	4000	1100
48604	4	1 3/8	1 1/2	3	1 31/32	3/8	4000	2100
48605	5	1 3/8	1 13/16	3 1/16	2 3/32	9/32	5000	2800

LONG POINT – MORSE TAPER

Model	MT	A	B	C	D	E	G	V2	I	Max. RPM	W. P. Weight
48102	2	3/8	1 7/8	2 3/8	1 3/4	1/4	5/8	40°	1 1/2	4000	310
48103	3	3/8	1 7/8	2 3/8	1 3/4	1/4	5/8	40°	1 1/2	4000	310
48104	4	1/2	2 7/32	3	1 31/32	3/8	13/16	40°	2	4000	1100
48105	5	1/2	2 1/2	3 1/16	2 3/32	9/32	15/16	40°	2 5/32	5000	1100