



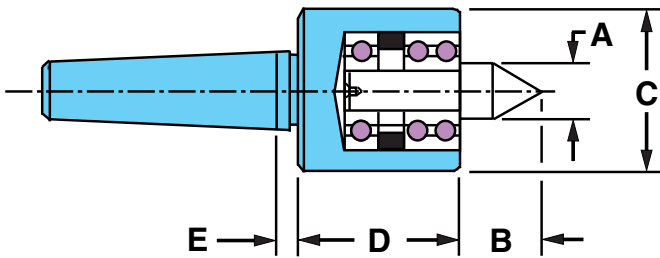

Econo Tri-Bearing Live Centers


Standard and Tracer Point

- Accuracy guaranteed to $\pm .0002$
- Three rows of bearings
- Points are through-hardened to 61-63 Rc
- Sealed bearings lubricated for life, protected against contaminants and coolant
- **Non-repairable**, trade-in available

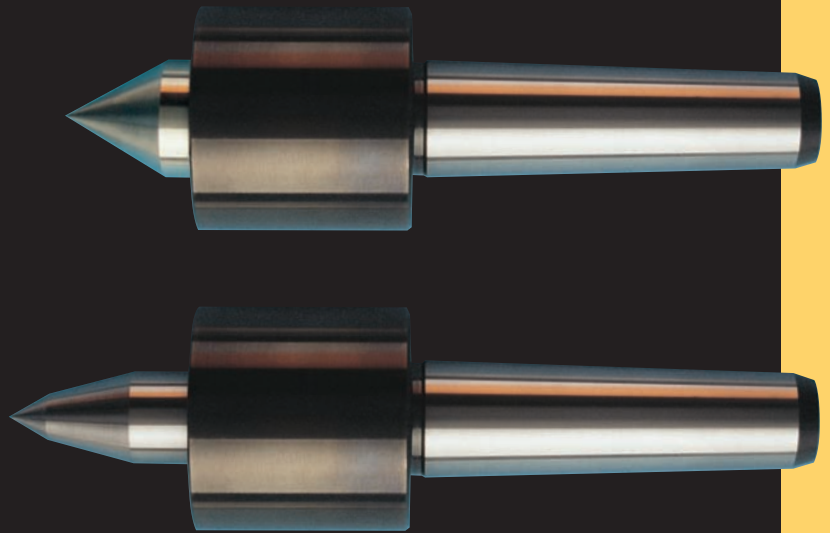

Standard Point

STANDARD POINT – MORSE TAPER								
Model	Taper	A	B	C	D	E	Max. RPM	W.P. Weight
44102	2	9/16	13/16	15/8	15/8	1/4	2500	300
44103	3	13/16	1	2	115/16	1/4	2500	500
44104	4	1	11/4	23/8	21/4	1/4	2500	1100
44105	5	1	11/4	23/8	21/4	1/4	2500	1100

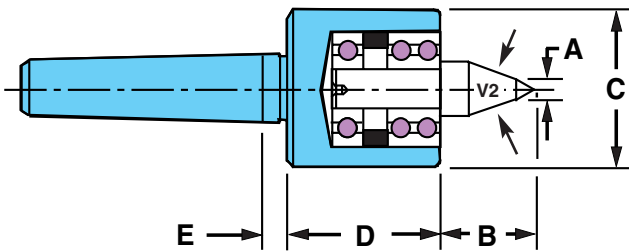

Tracer Point

TRACER POINT – MORSE TAPER									
Model	Taper	A	B	C	D	E	V2	Max. RPM	W. P. Weight
44902	2	3/8	11/4	15/8	15/8	1/4	18°	2500	300
44903	3	3/8	11/2	2	115/16	1/4	30°	2500	300
44904	4	1/2	2	23/8	21/4	1/4	30°	2500	900
44905	5	1/2	2	23/8	21/4	1/4	30°	2500	900