



Retractable-Jaw Shaft Chuck

- Machines shafts in one single clamping operation
- Change jaws and face driver to machine different sizes of shafts

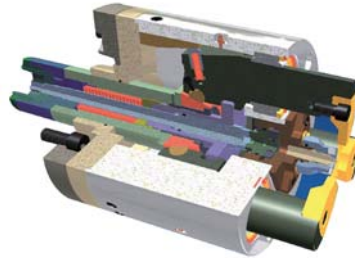

SPECIAL CHUCK

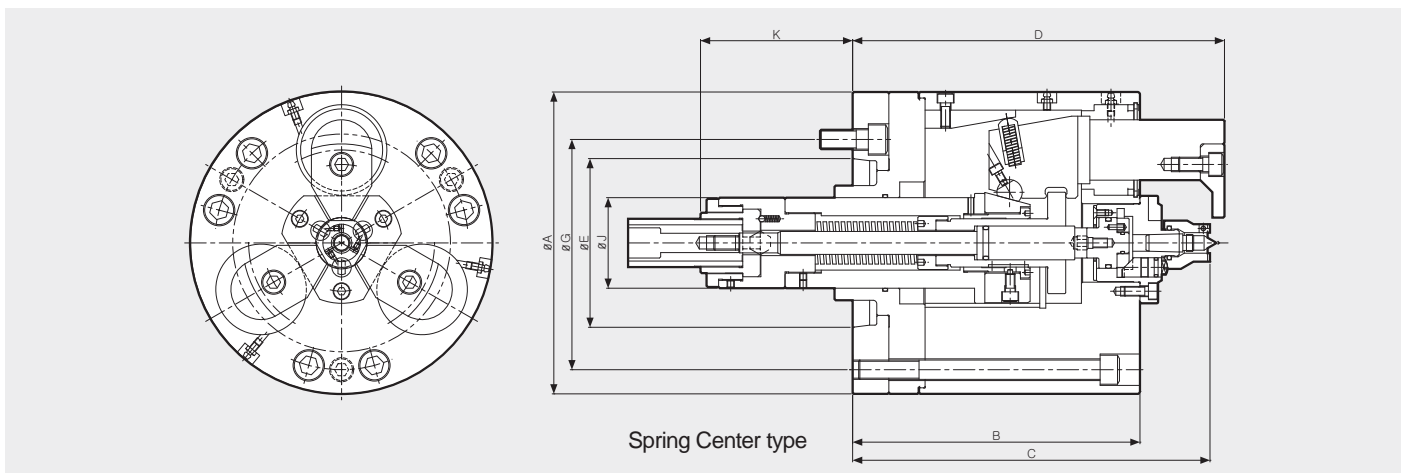

Dimensions

	ΦA	Bmax.	Bmin.	C	Dmin.	Dmin.	ΦE	ΦG	H	ΦJ	Kmax.	Kmin.	L	M	Pmax.	Pmin.	Q	R	Smax.	Smin.	T	U	V	W
RS-200	200	164	139	192	205	190	106.375	133.4	3xM12	50	96.5	58.5	M16	30	41.5	3.5	M34x0.5	30	92	82	12.5	10	M12	30
RS-250	250	205	173.5	240	252.5	221	139.719	171.4	3xM16	60	109.5	62.5	M20	45	49.5	2.5	M40x0.5	35	105	95	16.5	10	M16	37
RS-300	300	205	173.5	240	252.5	221	139.719	171.4	3xM16	80	114.5	67.5	M24	50	49.5	2.5	M50x0.5	40	110	100	13.5	10	M16	37

Specifications

Type	Max. Clamping Force	Max. Drawbar Pull	Clamping Range		Max. Speed	Weight	GD ²
	[kgf]	[kgf]	Chuck	Face Driver	[r.p.m.]	[kg]	[kgf-m ²]
RS-200	4000	3800	18-80	12-70	4000	35	0.19
RS-250	6500	6000	25-110	12-100	3500	60	0.79
RS-300	10000	8000	40-140	30-130	2500	100	1.35