



MCA

Stationary Pneumatic Chuck

- Compact design with built-in cylinder allows for larger machining area
- Suitable for long workpieces
- Compatible with air blow

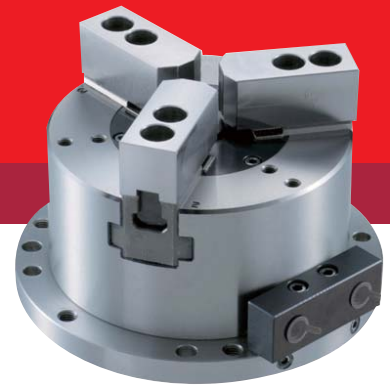

PNEUMATIC CHUCK

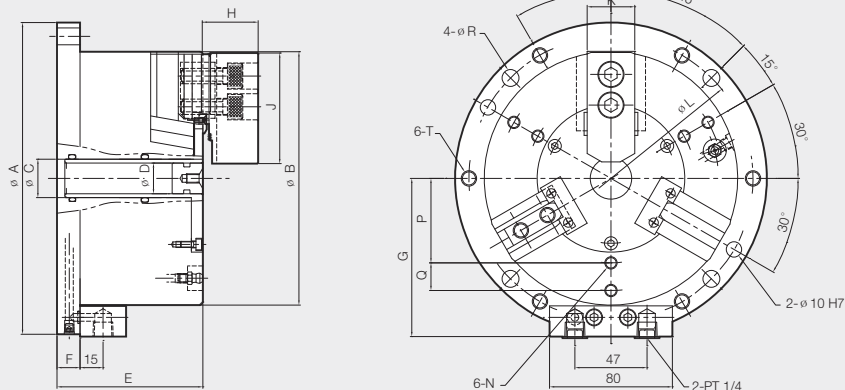

Dimensions

	ΦA	ΦB	ΦC	ΦD	E	F	G	H	J	K	N	ΦL(P.C.D)	Q	ΦR	T
MCA-04	148	110	20	-	90	15	75.5	27	55	23	M8	130	-	9	M10
MCA-06	203	165	25	20	95	15	103	36	72	31	M8	185	58	11	M10
MCA-08	248	210	36	30	106	15	125.5	42	95	35	M8	230	68	11	M10
MCA-10	300	254	50	43	110	16	147.5	46	110	40	M10	280	80	13	M12

Specifications

Type	Clamping Force (Pneumatic 6bar)	Jaw Stroke Dia.	Chucking Dia.		Max. Pneumatic Pressure	Weight
			Max. [mm]	Min. [mm]		
MCA-04	7.5kN (765) [kgf]	5.2 [mm]	110 Max. [mm]	10 Min. [mm]	7 [bar]	7.3 [kg]
MCA-06	21kN (2140)	5.2	165	23	7	16
MCA-08	33kN (3300)	6.3	210	30	7	28
MCA-10	48kN (4800)	6.3	254	50	7	43