


# DS-2CC12A2P(N)-IT3

## 700 TVL Outdoor EXIR Bullet Camera




**EXIR**

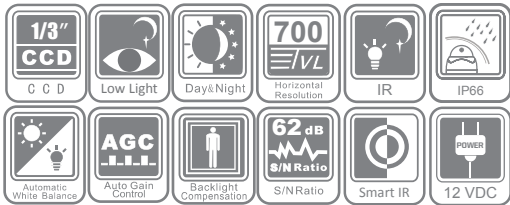

### Key features

- 1/3" CCD
- 700 TVL Horizontal Resolution
- Electronic Day/Night
- 0.001 lux /F1.2, 0.002 lux /F1.8
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- 40m IR Distance

### Dimensions

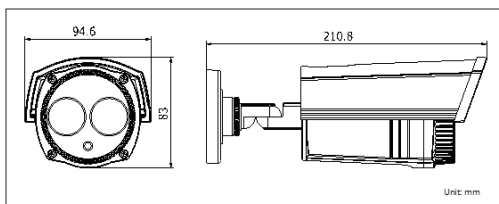

### Accessories



DS-1212ZJ  
(wall mount)



DS-1214ZJ  
(pole mount)



DS-1215ZJ  
(pole mount)

DS-2CC12A2P(N)-IT3	
<b>Camera</b>	
Image Sensor	1/3" CCD
Signal System	PAL/NTSC
Effective Pixels	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
Min. Illumination	0.001 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.002 Lux @ (F1.8, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6 mm @ F1.8 (2.8mm, 6 mm, 8 mm, 12mm, 16 mm optional) Angle of view: 70° (3.6 mm)
Lens Mount	M12
Day & Night	Electronic
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
<b>General</b>	
Working Temperature/Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)
Ingress Protection	IP66
IR Range	40 meters
Power Supply	12 VDC
Power Consumption	Max.5 W
Dimensions	94.6x83x210.8mm(3.72"x3.27"x8.30")
Weight	700 g (1.54 lbs)

### Available models

PAL: DS-2CC12A2P-IT3  
NTSC : DS-2CC12A2N-IT3