




## DS-2CD8153-E(W)(I) Mini Network Camera

- Up to 2 Megapixel resolution, support 1280x720 in real time
- H.264/MJPEG video compression with high compression ratio
- Progressive scan CMOS
- Built-in microphone and speaker
- Mini SD card local storage
- ePTZ
- PoE

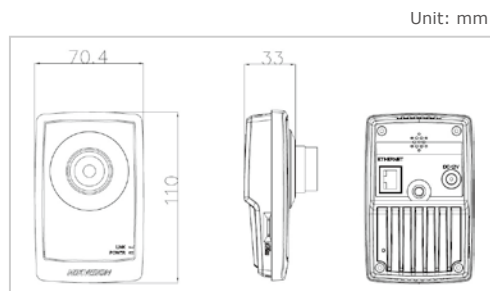

### Specifications

		DS-2CD8153F-E(W)(I)
Camera	Image Sensor	1/3" Progressive CMOS
	Min. Illumination	0.5Lux @ F1.2, 0.1Lux @(F1.2, sensitivity ×5) 1.1Lux @ F1.8, 0.2Lux @(F1.8, sensitivity ×5) -I: 0 Lux with IR on
	Electronic Shutter	1/25s ~1/100,000s
	Lens	4mm@F1.8 Angle of view: 54.9°
	Lens Mount	C/CS
	Day & Night	Electronic
Compression Standard	Video Compression	H.264/MJPEG
	Bit rate	32 Kbps~16Mbps
	Audio Compression	OggVorbis
Image	Max. Image Resolution	1600x1200
	Frame Rate	50HZ:12.5fps (1600×1200), 12.5fps(1600×912), 25fps(1280×960), 25fps (1280×720) 60HZ:15fps (1600×1200), 15fps(1600×912), 25fps(1280×960), 30fps (1280×720)
	Image Settings	Saturation, Brightness, Contrast adjustable through client software or web browser
Network	Storage	Support Mini SD, NAS(ISCST optional)
	Intelligent Alarm	Motion Detection, Storage exception
	Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, PPPoE, SMTP, NTP (SNMP,HTTPS, FTP, SIP, 802.1x, IPv6 optional)
Interface	Basic	Reset button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
	Audio	Built-in Microphone and Speaker
General	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet interface
	Operating Condition	-10°C~60°C(14°F~140°F), Humidity 90% or less(non-condensing)
	Power Supply	DC12V±10% / PoE
	Power Consumption	4W MAX -I: 5W MAX
	IR Range	-I: Within 10 meters (32.8ft)
	Dimension	110×70×33mm(4.33"×2.76"×1.30")
Weight	250g(0.55lbs)	

### Available Models

DS-2CD8153F-E, DS-2CD8153F-EW, DS-2CD8153F-EI

\*-W: support Wi-Fi function (802.11g)

-I: support infrared LED