


## DS-2CE16C2T-IT5

### HD720P Turbo HD EXIR Bullet Camera




## EXIR

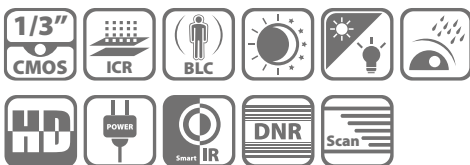

#### Key features

- HD720P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- EXIR technology, 80m IR distance
- IP66 weatherproof

#### Dimensions

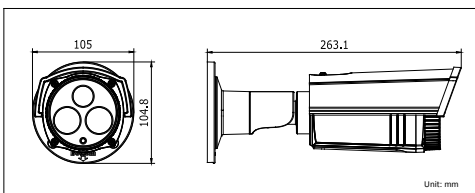

#### Accessories



Indoor / outdoor pole mount  
DS-1275ZJ



Video balun  
DS-1H18

#### Available models

DS-2CE16C2T-IT5

DS-2CE16C2T-IT5	
Camera	
Image Sensor	1 / 3" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1280(H)×720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	1 / 25(1 / 30) s to 1 / 50,000 s
Lens	3.6mm (6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 76.88°(3.6mm), 50.1°(6mm), 36.8°(8mm), 24.33°(12mm), 18.4°(16mm)
Lens Mount	M12
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	25 fps (PAL) / 30 fps (NTSC)
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
General	
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC±10%
Power Consumption	Max. 4.5W
Weather Proof Ratings	IP66
IR Range	Up to 80m
Dimensions	105×104.8×263.1mm(4.13" ×4.13" ×10.36")
Weight	800 g (1.76 lb)