


DS-2CE5512P(N) -IRP


500 TVL DIS Indoor IR Dome Camera

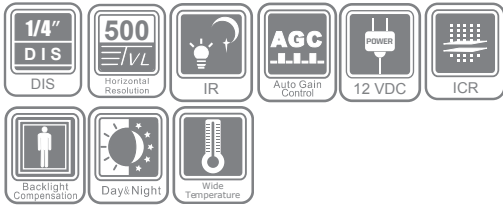

Key features

- 500 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:
-40°C to 60°C(-40°F to +140°F)

Dimensions

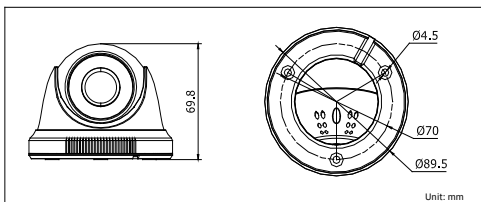

	DS-2CE5512P(N)-IRP
Camera	
Image Sensor	1/4" DIS
Signal System	PAL/NTSC
Effective Pixels	640 (H) × 480 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6 mm (2.8mm,6 mm optional) Angle of view: 70.6° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°; Tilt: 0 - 85°; Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	500 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1.5 W (Max. 4.5 W with IR cut filter on)
IR Range	20 meters
Dimensions	Ø89.5 × 69.8 mm (3.52" × 2.75")
Weight	200 g (0.44 lbs)

Available models

PAL: DS-2CE5512P-IRP
NTSC: DS-2CE5512N-IRP