

DS-2CE56C2T-IT3



Key Features

- 1.3 Megapixel high-performance CMOS
- Turbo HD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- EXIR technology, up to 40m IR distance
- IP66 weatherproof

Specification


Model	DS-2CE56C2T-IT3
Parameter	720p EXIR Turbo HD Turret Camera
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm), 36.8°(8mm), 24.33°(12mm), 18.4°(16mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Turbo HD output
S/N Ratio	More than 52dB
General	

Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 40m
Dimension	Φ114.6 × 89.1mm(Φ4.5" × 3.5")
Weight	Net weight: 286 g (0.63 lb)
	Shipping weight: 365 g (0.8 lb)

Order Model

DS-2CE56C2T-IT3

Dimension

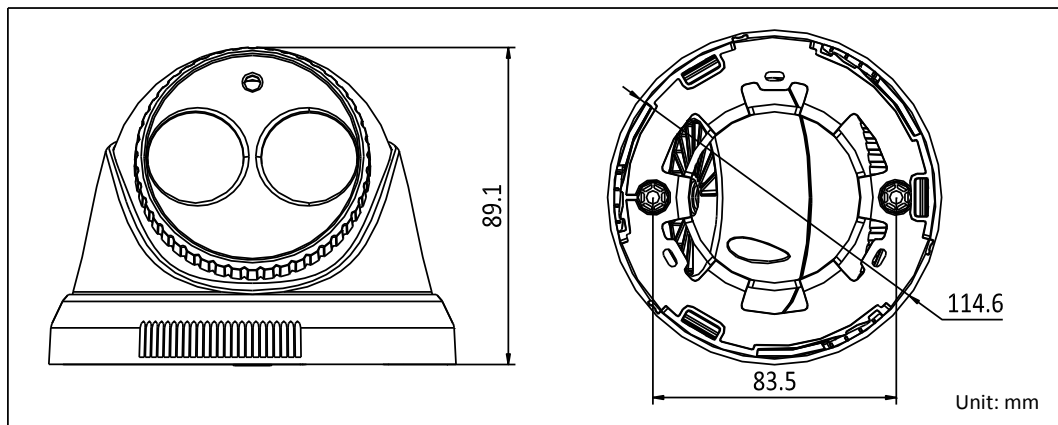

Accessories



Indoor/outdoor wall mount
DS-1272ZJ-110



Indoor wall mount
DS-1258ZJ