

Product profile

SR61B

Rugged Handheld Scanner



- Interfaces with Intermec terminals and personal computers
- Choice of linear imager, area imager, or standard range laser scan options
- Easy configuration and personalization
- Industrial durability stands up to harsh environments

The Intermec SR61B handheld scanner meets the needs of rugged applications in warehouse, distribution center and industrial manufacturing settings. The SR61B is engineered to withstand the abuse of industrial environments and to satisfy user demands that hand held scanners be as durable as forklifts. Its high impact housing is virtually impenetrable, and its solid state design provides protection exceeding industrial and military standards. The SR61B thrives in harsh environments where dust, moisture or extreme temperatures are constants and production uptime is critical.

The SR61B wireless handheld scanner incorporates the flexibility and rugged design of a handheld scanner with the seamless functionality of wireless communication. The SR61B features a personal area network (PAN) radio based on Bluetooth® communication protocol, making scanning easier and safer with no costly cables to damage or become entangled. Users gain hassle-free mobility up to 30 meters (100 feet) from the host.

With the ability to interface with Intermec computer products including the CN50, CN3 series, CK3, CK30, CK31, CK32, CK60, CK61, CV30, CV60, 700 series standard PCs, the SR61B cordless scanner increases productivity while keeping costs down. Users can connect to one Intermec

host device enabling multiple people to scan items for inventory management, picking, shipping and receiving, cross docking, work-in-process, tool crib, and pallet tracking, all with ease.

With multiple scan options, including linear, area and standard range laser, the SR61B allows users to configure the scanner to meet the specific needs of their environment, whether they include reading specific barcode symbologies, decoding poor quality or damaged barcodes with ease or utilize image capture for proof of delivery and point of service applications.

The SR61B includes Intermec's EasySet™ software setup tool for easy configuration and personalization. The user can quickly set security options, select beeper tones and volumes, good read and error read responses, and many other customizations.

Scan intensive applications require reliable, accurate scanning and the SR61B delivers. The SR61B is designed to withstand rigorous application environments surviving multiple drops to concrete, cold and hot temperatures, and sealed to withstand dirt and water.

The SR61B cordless scanner delivers 10+ hours of use with a long lasting lithium ion battery that can be easily swapped ensuring minimal downtime.

Physical Characteristics

Length: 17.78 cm (7 in)
Width: 6.99 cm (2.75 in)
Depth: 11.43 cm (4.5 in)
Weight (Cordless version with battery):
 425 gm (15 oz)
Weight (Cabled version without cable): 280 gm (10 oz)

Power (Cordless)

Battery Type: Lithium-ion
Battery Life: 10+ hours per full charge
Recharging Time: 2.5 hours for 90% charge

Power (Cabled)

Cabled versions are powered via host or universal 5 volt power supply

Connectivity

Bluetooth radio connection to Intermec computers including the CN50, CN3 series, CK3, CK30, CK31, CK32, CK60, CK61, CV30, CV60, 700 series and standard PCs.

Interfaces

RS232, USB, Keyboard Wedge, Wand Emulation

Radio Characteristics

Frequency Band: 2.4 Ghz
Radio Type: Bluetooth Class 1 version 1.2
Radio Data Rate: 1 megabit per second

Radio Range

Host radio Class 1: 30.5 m (100 ft)
Host radio Class 2: 10 m (32.8 ft)
Features: Adaptive Frequency Hopping

Scan Engine Options

Standard range laser (EL20)
 Linear imager (EV10)
 Area imager (EA11)

Scan Range

Standard range laser - Intermec EL20

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.125mm 5 mil	10 cm 3.94 in	20 cm 7.87 in
UPC/EAN	0.33 mm 13 mil	*	55 cm 21.65 in
Code 39	1.397 mm 55 mil	*	150 cm 59.06 in

Area Imager - Intermec EA11

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.125mm 5 mils	7.5 cm 3 in	12.5 cm 4.9 in
	0.25 mm 10 mils	3.8 cm 1.5 in	26.5 cm 10.4 in
	0.5 mm 20 mils	4.5 cm 1.8 in	48 cm 18.9 in
	UPC/EAN	0.33 mm 13 mils	4.5 cm 1.8 in
Data Matrix	0.168 mm 6.6 mils	8.2 cm 3.2 in	12 cm 4.7 in
	0.254 mm 10mils	5 cm 2 in	21 cm 8.3 in
	0.381 mm 15 mils	4 cm 1.6 in	31.5 cm 12.4 in
	0.168 mm 6.6 mils	6.4 cm 2.5 in	15.8 cm 6.2 in
PDF417	0.254 mm 10 mils	4.2 cm 1.7 in	23.5 cm 9.3 in

Linear Imager - Intermec EV10

Symbology	Bar Code Content	Density	Minimum Distance	Maximum Distance
Code 39	RESO	0.1 mm	10 cm	15 cm
	0.100MM	4 mil	3.9 in	5.9 in
	R 0.125 MM	0.125 mm 5 mil	9 cm 3.5 in	18.5 cm 7.3 in
	0.25	0.25 mm 10 mils	5.5 cm 2.2 in	27.5 cm 10.8 in
UPC/EAN	.5	.05 mm 20 mil	4 cm 1.6 in	37 cm 14.6 in
	RiMM	1 mm 40 mil	7.5 cm 3 in	51 cm
	12001000	0.33 mm 13 mils	5.2 cm 2 in	29.5 cm 11.6 in
	10100	0.254 mm 10 mils	10 cm 3.9 in	17.5 cm 6.9 in
PDF417	15 mil	0.381 mm 15 mils	8 cm 3.1 in	19.5 cm 7.7 in

Supported Bar Code Symbologies

1D (all versions): Code 128/EAN128; Code 39; Interleaved 2/5; UPC/EAN/ISBN including add-ons; 2/5 Matrix, standard; Codabar; Code 93; MSI; Plessey; Code 93i; Code 11; Telepen; ISBT128; RSS
Stacked (Linear and Area versions only): RSS; Micro PDF; PDF417; Macro PDF; Codablock; TLC39; Composite Codes (CC-A, B & C)
2D (Area version only): Maxicode; DataMatrix; QR Code; 4-State Postal Code; Planet Postal Code; Postnet Postal Code

Environment


Operating Temperature: -20°C to +50°C (-4°F to +122°F)
Storage Temperature: -40°C to +70°C (-40°F to +158°F)
Recharging Temperature: 0°C to +35°C (32°F to +95°F)
Humidity: 0 to 95% RH, Non-condensing
Shock and Vibration Protection: SAE Specification J1399 Class 3 (off road vehicle)
Rain and Dust Resistance: IP54
Drop Survival: 26 drops onto concrete or steel surface from a height of 1.98 meters (6.5 feet)
Ambient light: Works in any lighting conditions from 0 to 100,000 lux

Accessories (Wireless)

SD61 Base Station
 SR61 Dangle Suspension (wrist or fixed)
 Belt Holster
 Desktop / Wall Mount Charger
 2, 4 and 8 Bay Charger
 Bluetooth USB Adapter
 Replacement Battery w/ Boot
 EasySet™ Configuration Utility
 Bluetooth RS232 adapter
 Keypoint Lite Software Wedge (for use with PCs using Win 95, 98, 2000, XP SP1 and English QWERTY keyboards)
 Keypoint Bluetooth Software Wedge (for use with PCs using Win XP SP2 and international keyboard types)

Regulatory Approvals

CISPR 22 Class B; Part 15 of FCC rules, Class B; CE Mark (EU) (EN 55024, EN 55022 Class B, IEC 60950-1, IEC 60825-1); cULus (Canada and the USA) (UL 60950-1); GS Mark (Germany) (EN 60950-1, EN 60825-1); NOM (Mexico); C-TICK (Australia and New Zealand) (AS/NZS 3548 based on CISPR22); CQC and SRRS (China); Spring Mark (Singapore); MIC (South Korea); ANATEL (Brazil)

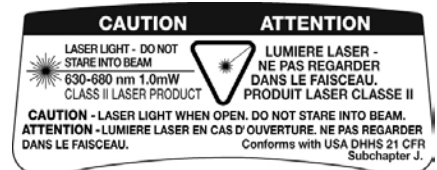

North America

Corporate Headquarters
 6001 36th Avenue West
 Everett, Washington 98203
 Phone: (425) 348-2600
 Fax: (425) 355-9551

North Latin America

Headquarters Office
 Mexico
 Phone: +52 55 52-41-48-00
 Fax: +52 55 52-11-81-21

South Latin America

Headquarters Office
 Brazil
 Phone: +55 11 5502.6770
 Fax: +55 11 5502.6780

Europe/Middle East & Africa

Headquarters Office
 Reading, United Kingdom
 Phone: +44 118 923 0800
 Fax: +44 118 923 0801

Asia Pacific

Headquarters Office
 Singapore
 Phone: +65 6303 2100
 Fax: +65 6303 2199

Internet

www.intermec.com
 Worldwide Locations:
 www.intermec.com/locations

Sales

Toll Free NA: (800) 934-3163
 Toll in NA: (425) 348-2726
 Freephone ROW:
 00 800 4488 8844
 Toll ROW: +44 134 435 0296

OEM Sales

Phone: (425) 348-2762

Media Sales

Phone: (513) 874-5882

Customer Service and Support

Toll Free NA: (800) 755-5505
 Toll in NA: (425) 356-1799

Copyright © 2009 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611988-01B 08/09

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

